TIPT Handset, Device and Headset Guide






Contents

TIPT Handset, Device and Headset Options

Poly Handsets	03
Poly Handset Matrix	04
Cisco Handsets	05
Cisco Handset Matrix	07
Panasonic DECT Handsets	08
Devices - IADs	09
Headsets - Cisco	10
Headsets - Jabra	12
Headsets - Plantronics	13

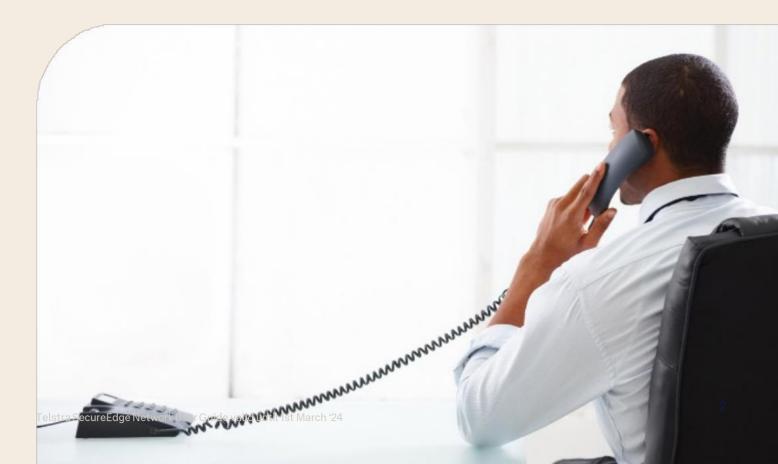

TIPT Handsets – Poly

Poly Edge E220

	 2.8 Inch Colour LCD (320 x 240 Pixel Resolution) 4-line keys supporting up to 16 lines, features and contacts. Integrated Power over Ethernet support (IEEE 802.3af) Integrated Bluetooth® 5.0 for mobile phone or headset pairing. Signature Poly HD voice. Poly NoiseBlockAI and Poly Acoustic Fence technologies. Single RJ-9 headset port; 1 x USB type c 2.0 port (headset capable) 2 x 10/100/1000 Base-TX Gigabit Ethernet switch ports (across LAN and PC Ports)
Poly Edge E350	
	 3.5 Colour LCD (320 x 240 Pixel Résolution) 8-line keys supporting up to 32 lines, features and contacts Integrated Power over Ethernet support (IEEE 802.3af) Integrated Bluetooth[®] 5.0 for mobile phone or headset pairing. Signature Poly HD voice. Poly NoiseBlockAI and Poly Acoustic Fence technologies. Single RJ-9 headset port; 1 x USB type c 2.0 port (headset capable) 2x10/100/1000 Base-TX Gigabit Ethernet switch ports (across LAN and PC ports)-WiFi
Poly Edge E450	
	 3.5 Inch LCD Screen (320 x 240 Pixel Resolution) 14-line keys (arranged 8+6 on two displays) supporting up to 44-line key assignments for lines, contacts, and features supported with pagination Integrated Power over Ethernet support (IEEE 802.3af) Integrated Bluetooth® 5.0 for mobile phone or headset pairing. Signature Poly HD voice. Poly NoiseBlockAI and Poly Acoustic Fence technologies. Single RJ-9 headset port; 2 x USB 2.0 ports (headset-capable) 2x10/100/1000 Base-TX Gigabit Ethernet switch ports (across LAN and PC ports)-WiFi
Poly Trio 8500 Audio & Video Cof	erencing - Small to Medium Room
	 4.3 Metre microphone pickup range Integrated PoE support (IEEE 802.3af) Patented Polycom Acoustic Clarity™ Polycom HD Voice for all audio paths (160-22,00Hz) Gesture-based, multitouch-capable capacitive touch screen Supports External Microphones One-port 10/100/1000 Ethernet switch Bluetooth Support
Poly Trio 8800 Audio & Video Cor	nferencing- Medium to Large Room
	 6 Metre microphone pickup range Integrated PoE support (IEEE 802.3af) Patented Polycom Acoustic Clarity™ Polycom HD Voice for all audio paths (160-22,00Hz) Gesture-based, multitouch-capable capacitive touch screen Supports External Microphones Two-port 10/100/1000 Ethernet switch & 802.11 a/b/g/ Wi-Fi Bluetooth Support
Expansion module for Poly Edge I	E 450
	 Application target: telephone attendant's desk – High Performance Attendant Console for Edge 450 5.0 Inch LCD WVGA Colour Screen (480 x 800 Pixels) 22 multifunctional line keys configurable as line registrations, Enhanced Feature Keys, call appearances, contacts, speed dials, busy lamp fields Power and signalling are provided by the host phone - no AC power required 3-page keys for additional line appearances 1 EM module can be installed on a single Edge 450 handset

TIPT Handsets – Poly Matrix

Edge series features	Poly E220	Poly E350	Poly E450
Display	2.8-inch Colour LCD(320 x 240 Pixel Resolution)	3.5-inch Colour LCD (320 x 240 Pixel Resolution)	Color 3.5" IPS LCD primary display (320x240 pixel resolution) and Color 2.4"(240x320 pixel resolution) secondary LCD display for BLF and contacts
Expansion module support			Poly Edge E expansion module supported
Power over ethernet IEEE 802.3af	1	\checkmark	~
Audio Features			
Polycom HD voice technology	1	\checkmark	~
Full duplex speakerphone with acoustic clarity technology	~	~	~
Telephony keys			
Line / speed dial keys	\checkmark	\checkmark	\checkmark
Handsfree and mute	✓	\checkmark	✓
Headset and EHS	✓	\checkmark	~
Context sensitive soft keys	✓	\checkmark	~
Display / Navigation keys	\checkmark	\checkmark	\checkmark
Advanced features			
Busy lamp field functionality	\checkmark	\checkmark	\checkmark
Shared call line appearance	~	~	~
Multicall appearances	\checkmark	\checkmark	✓
XHMTL browser	~	\checkmark	~
RJ-9 and USB headset	~	\checkmark	✓
Bluetooth	\checkmark	\checkmark	\checkmark
LAN / PC connectivity			
Ports / speed Mbps	Two port 10/100/1000	Two port 10/100/1000	Two port 10/100/1000
WiFi		\checkmark	~

TIPT Handsets – Cisco

Cisco 6851 - Entry Level Monochrome Business Phone

	 Application target: cubicle office worker4 lines (standalone) with expansion module capability Integrated PoE support (IEEE 802.3af) Duplex Speakerphone Wideband audio 3.5-inch (396x162-pixel) grayscale display RJ 11 Headset Two-port 10/100/1000 Ethernet switch
Cisco 6871 Multiplatform Phone	
	Application target: Managers and Staff

- 6 lines (standalone) with Expansion Module capability •
- USB port for use with headsets
- 3.5-in.(9-cm) 480 x 272-pixel colour display
- Supports a wideband audio handset connected through an RJ-9 port
- Integrated PoE support (IEEE 802.3af); power consumption does not exceed 12.95W
- Two-port 10/100/1000 Ethernet switch •

Cisco 7861 - Easy-to-Use, Cost-Effective Voice Collaboration

- Application target: Managers and Staff and Speed dial / BLF •
- 16 lines (standalone)
- Integrated PoE support (IEEE 802.3af)
- Wideband audio
- 396 x 162 pixel (89 mm)
- Duplex Speakerphone
- RJ 11 Headset •
- Two-port 10/100 Ethernet switch

e with Colour Display C

- Application target: office worker
- 10 lines (standalone) with Expansion Module capability
- Wideband audio
- Integrated PoE support (IEEE 802.3af) ٠
- 5-inch widescreen VGA (800x480 pixel), 24-bit colour
- USB Headset Support
- Bluetooth Support
- Two-port 10/100/1000 Ethernet switch

isco	8851	- Pre	miun	n IP P	hon
		-			
			-		

С

TIPT Handsets – Cisco

Ι

Cisco 8865 Affordable, High-Quality Desktop HD Video

	 Application target: Executive 10 lines (standalone) with Expansion Module capability Wideband audio Integrated PoE support (IEEE 802.3af) 720p HD desktop video 5-inch widescreen VGA (800x480 pixel), 24-bit colour USB Headset Support Bluetooth Support Wi-Fi - 802.11a/b/g/n/ac Two-port 10/100/1000 Ethernet switch
Cisco 6800 Expansion Module	
	 Application target: telephone attendant's desk 14 Physical Buttons Up to 28 buttons across 2 pages Power and signalling are provided by the host phone - no AC power required Note: Does not support SIP Line Registrations Expands Cisco 6851 only

Cisco 8865 and 8851 Expansion module

•	Application target: telephone attendant's desk Graphical, backlit, high-resolution
	colour display

- 14 Physical Buttons
- Up to 28 buttons across 2 pages
- Expands Cisco 8851 and 8865 only



TIPT Handsets – Cisco Matrix

Edgeseries					
features	Cisco 6851	Cisco 6871	Cisco 7861	Cisco 8851	Cisco 8865
					J
Video					\checkmark
Display	3.5 inch (396 x 162 pixel) grayscale display	High-resolution 3.5 inch (480 x 272 pixel) color display with backlighting	3.5 inch (396 x 162 pixel) grayscale display	5 inch widescreen VGA (800 x 480 pixel), 24-bit color	5 inch widescreen VGA (800 x 480 pixel), 24-bit color
Expansion Module Support	~			\checkmark	\checkmark
Power over ethernet	~	\checkmark	~	~	~
Audio Features					
Wideband Voice Technology	~	~	\checkmark	\checkmark	~
Full duplex speakerphone	~	\checkmark	\checkmark	\checkmark	\checkmark
Telephony keys					
Line/speed dial keys	4	6	16	10	10
Handsfree and mute	~	\checkmark	\checkmark	\checkmark	\checkmark
Headset and EHS	~	\checkmark	\checkmark	~	\checkmark
Advanced feature	es				
Busy lamp field functionality	~	\checkmark	\checkmark	\checkmark	\checkmark
Shared call line appearance	~	\checkmark	~	~	~
Multicall appearances	~	\checkmark	~	~	~
USB headset		~		~	\checkmark
RJ9 headset	~	~	\checkmark	~	\checkmark
Bluetooth				~	\checkmark
LAN / PC connec	tivity				
Ports/speed Mbps	Two port 10/100/1000	Two port 10/100/1000	Two port 10/100	Two port 10/100/1000	Two port 10/100/1000
WiFi					\checkmark

TIPT Handsets - Grandstream WIFI & DECT

Grandstream - WP820 Wi-Fi IP Phone

Dual-band WiFi and advanced roaming support	
---	--

- Bluetooth for syncing headsets and mobile devices
- HD voice & dual MIC design
- Rechargeable 1500mAh battery
- 7.5-hour talk time, 150-hour standby
- Accelerometer and configurable button for push-to-talk, panic and other related functions
- Micro USB port and 3.5mm headset jack
- 2 SIP accounts, 2 lines

Grandstream – DP752 HD DECT Base				
ORANGETREZAM	 Pairs with up to 5 of Grandstream's DP series DECT handsets Instant pairing using a dedicated pairing button Up to 10 SIP accounts per system; up to 10 lines per handset Support outdoor range of up to 400 meters with the DP730 or up to 350 meters with DP722/DP720 as well as indoor range up to 50 meters Supports Push-to-Talk and activity based on proximity and accelerometer sensors 			

Grandstream – DP722 HD DECT Handset

	• Supports a range of up to 350 meters outdoors and 50 meters indoors when used with
	the DP752 (300 meters outdoors when used with DP750)
	• 1.8-inch (128x160) colour LCD with 2 programmable soft keys
1000	Offers 20 hours talk time and 250 hours standby time
	• Supports up to 10 SIP accounts and 10 lines per handset as well as 3-way conferencing
TAT	Push-to-talk via a configurable button
	HD audio on the speakerphone, handset, and headset jack
And second	

Grandstream - DP760 DECT Repeater

- The DP760 is a wideband HD DECT repeater that auto associates with Grandstream's DP752 DECT Base Station to offer extended mobility for users
- Additional range of 300 meters outdoors and 50 meters indoors
- Automatic or manual association to DP750/DP752 base stations for easy use
- Power over Ethernet enabled



TIPT Devices - IADs

Integrated access device - Cisco	ATA1922 port IAD
	 Multiplatform Analog Telephone Adapter interfaces traditional analogue telephone, fax and overhead paging communications devices into the SIP TIPT platform Features two RJ-11 FXS ports; 2 x 100BASE-T Supports up to 2 analogue devices such as Standard Telephones (POT); FAX machines, Public Address systems Supports up to 2 FAX machines
Integrated Access Device - One A	Access – 8 Port IAD - One100 SX5E 2V
Megicik www.	 Multiplatform Analog Telephone Adapter interfaces traditional analogue telephone, fax and overhead paging communications devices into the SIPTIPT platform Connects up to a total of 8 analogue devices; such as Standard Telephones (POT); FAX machines; Public Address system. 4 x 10/100Mbps, half/full duplex with auto-sense (LAN); 1 x 10/100Mbps, half/full duplex with auto-sense (WAN)
Integrated Access Device - One A	Access - 24 Port IAD - One700 Gb5T 24V
	 Multiplatform Analog Telephone Adapter interfaces traditional analogue telephone, fax and overhead paging communications devices into the SIPTIPT platform Connects up to a total of 24 analogue devices Features 24 RJ-11 FXS ports via RJ-21 cable Supports up to 24 devices such as Standard Telephones (POT); FAX machines; Public Address system Includes a single multi-port RJ-21 50-pin connector

TIPT Headsets - Cisco

Cisco 561 Wireless Single Headset w Standard Base

	 Mono wireless Headset DECT wireless, up to 100 metres roaming Auto-answers when undocked Base connections:USB-A connection and RJ9/11Y -cable On-ear call control capabilities, including answer call, end call, reject call, hold/ resume (for multiple calls), mute/unmute, volume up, and volume down. AES-128 encryption Up to 3 headsets can pair to base at once Narrowband (8 kHz), Wideband (16 kHz), Full band (48 kHz)
Cisco 561 Wireless Single Headse	et w Multi Base
	 Mono wireless Headset DECT wireless, up to 100 metres roaming Auto-answers when undocked Base connections: USB-A connection; RJ9/11 Y -cable; Bluetooth On-ear call control capabilities, including answer call, end call, reject call, hold/ resume (for multiple calls), mute/unmute, volume up, and volume down. AES-128 encryption The headset can answer calls from any source with a single press of a button. The Multibase station will automatically select the source with the incoming call. Simultaneously connect to multiple physical and Bluetooth sources. Select a connection with the source selector buttons on the base station Pair Bluetooth devices to the base for convenient connectivity to mobile devices and phones. The Multibase station supports four paired devices and one active Bluetooth connection. Narrowband (8 kHz), Wideband (16 kHz), Full band (48 kHz) NOTE: INCOMPATIBLE with Cisco IP Phone 7800 Series phones using Power over Ethernet (PoE). Use the external power supply if you intend to connect the multibase.
Cisco 562 Wireless Dual Headset	w Standard Base
	 Stereo wireless Headset DECT wireless, up to100 metres roaming Auto-answers when undocked Base connections: USB-A connection and RJ9/11 Y -cable On-ear call control capabilities, including answer call, end call, reject call, hold/ resume (for multiple calls), mute/unmute, volume up, and volume down. AES-128 encryption Up to 3 headsets can pair to base at once Narrowband (8 kHz), Wideband (16 kHz), Full band (48 kHz)

TIPT Headsets - Cisco

Cisco 562 Wireless Dual Headset w Multi Base

	 Mono wireless Headset DECT wireless, up to 100 metres roaming Auto-answers when undocked Base connections: USB-A connection; RJ9/11 Y -cable; Bluetooth On-ear call control capabilities, including answer call, end call, reject call, hold/ resume (for multiple calls), mute/unmute, volume up, and volume down. AES-128 encryption The headset can answer calls from any source with a single press of a button. The Multibase station will automatically select the source with the incoming call. Simultaneously connect to multiple physical and Bluetooth sources. Select a connection with the source selector buttons on the base station Pair Bluetooth devices to the base for convenient connectivity to mobile devices and phones. The Multibase station supports four paired devices and one active Bluetooth connection. Narrowband (8 kHz), Wideband (16 kHz), Full band (48 kHz) NOTE: INCOMPATIBLE with Cisco IP Phone 7800 Series phones using Power over Ethernet (PoE). Use the external power supply if you intend to connect the multibase.
Cisco 730 Wireless Dual Headset	USB w Charger
	 Stereo Wireless Bluetooth Headset; 40mm Speakers USB-A; 3.5mm. Simultaneous connections: 2 Bluetooth + 1 USB Integrated Presence LED light; On-ear call and music controls Active Noise Cancellation, voice activated microphones, background noise suppression 22 hours talk time OR 37 hours music time; Charge by USB C input OR charging stand; Charging Time: 150 minutes
Plantronics Blackwire 225, Stereo	Headset
60	 Headset - wired - 3.5mm plug Mac, Windows Computer - communication On-ear headphones; Binaural Frequency Response 20 - 20000 Hz Boom Mute, volume

TIPT Headsets - Jabra

Jabra Evolve2 30 USB-A UC Stereo



• Corded Stereo Headset

Corded Stereo Headset

• Integrated Busy Light

Noise-Cancelling Microphone • USBType-C or USBType-A Connectivity Stainless Steel Headband & Slider

Angled Earcups with Memory Foam Cushions

٠

•

٠

- Dual Microphone boom design
- 28 mm Drivers
- USB Type-A Wired Connection
- Noise Isolation

Jabra Evolve2 40 USB-A, MS Stereo




Jabra Evolve2 65Link380a UC Stereo Black

	 Wireless Stereo Headset Bluetooth; Range 33 Metres40 mm speakersMicrophones: 3 Digital MEMSTalk Time Busylight Off: up to 35 hrs; Busylight On: up to 24 hrs; Media Time: up to 37 hrs Smartphones, tablets, and computers USB Charging
Jabra Engage 75 Stereo	
	 Stereo Wireless Headset DECT range up to 150 meters Busy light 13 hours talk time; 40% charge after 30 minutes; 100% charge after 90 minutes Headset controls: answer and end calls; mute and adjust volume 2x micro USB, RJ-9 for handset, RJ-9 for deskphone audio, RJ-45 for AUX

TIPT Headsets - Plantronics

Plantronics Blackwire C3210 (Basic, Mono, USB-A)

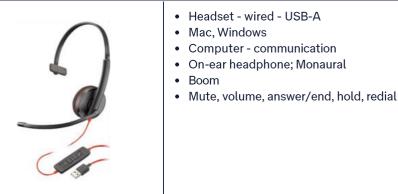

Plantronics Blackwire 5210 (Mid, Mono, USB-A)



- Mac, WindowsOn-ear headphone; MonauralUSB Type-A; 3.5 mm audio
- Boom
- Omnidirectional
- Noise and echo reduction;
- Dynamic EQ optimized

Plantronics Blackwire 5220 (Mid, Stereo, USB-A)

	 Mac, WindowsOn-ear headphone; Stereo Headset - Wired - USB Type-A; 3.5 mm On-ear (stereo)Wired USB Type-A; 3.5 mm Dynamic mute alert; Digital signal processing Noise cancellation
Plantronics Voyager Focus UC (S	tereo ANC, USB-A/Bluetooth)
	 Supports a range of up to 350 meters outdoors and 50 meters indoors when used with the DP752 (300 meters outdoors when used with DP750) 1.8-inch (128x160) colour LCD with 2 programmable soft keys Offers 20 hours talk time and 250 hours standby time Supports up to 10 SIP accounts and 10 lines per handset as well as 3-way conferencing Push-to-talk via a configurable button HD audio on the speakerphone, handset, and headset jack

TIPT Headsets - Plantronics

Plantronics Blackwire 225, Stereo Headset

	 Headset - wired - 3.5mm plug Mac, Windows Computer - communication On-ear headphones; Binaural Frequency Response 20 - 20000 Hz Boom Mute, volume
Plantronics APC 43- EHS (Cisco)	
03	 Electronic Hook Switch for remote call answering. Suits the following Cisco models: 7861, 8851, 8865
Plantronics APP-51 EHS (For Savi	, CS500, B335) — Polycom
	 Electronic Hook Switch for remote call answering. Compatible with Poly Edge E220, E350, E450

Contact your Telstra account representative for more details



📞 1300 telstra (1300 835 787)

H Telstra.com.au